

PRODUCT DATASHEET

Confidex Steelwave Micro™



CONTENTS

1	PRODUCT DESCRIPTION	2
1.1	SPECIFICATION DATA.....	2
1.2	DIMENSIONS	2
1.3	ELECTRICAL PERFORMANCE.....	3
1.4	RADIATION PATTERNS.....	3
1.5	RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS*	4
1.6	SUPPORTING COMPONENTS.....	4
1.7	SUPPORTED SERVICES	4
1.8	POSSIBLE APPLICATIONS.....	4
2	INSTALLATION INSTRUCTIONS.....	5
2.1	TAG PLACEMENT	5
2.2	TAG FIXING METHODS.....	5
3	ORDER INFORMATION	6

1 PRODUCT DESCRIPTION


Confidex Steelwave Micro™ is a miniature UHF on-metal tag, which for its size provides unparalleled performance. It offers new possibilities for companies to improve their asset management, especially computers and other devices that contain valuable information. The performance and value of Steelwave Micro has excited organizations as more accurate information about their property can be retrieved faster and with less error. Increasing demand for recycling of electronics will also require better practices than currently in use.

1.1 SPECIFICATION DATA

Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPCGlobal Class1 Gen2 ISO 18000-6C
Operational frequency (See IC option below)	865-869 MHz (EU) (*) 902-928MHz (US) (* and **) 952-955MHz (JPN) (*)
IC options	Impinj Monza (*) Alien Higgs3 (**)
EPC memory	96 bit (* and **)
Extended memory	512 bit (**)
EPC memory content	Unique number encoded as a default
Read range	3 m / 9.8 ft *, reader power 2W ERP 4 m / 13 ft **, reader power 2W ERP (dependent on application)
Applicable surface materials	Metal surfaces and plastic
Face material	White synthetic material
Background adhesive	High performance acrylic adhesive
Weight	2 g
Delivery format	Single
Amount in box	1000pcs
Product is RoHS compliant	


1.2 DIMENSIONS

General dimensions
(Width x Height x Thickness)
38 x 13 x 3 mm / 1.5 x 0.5 x 0.12 in

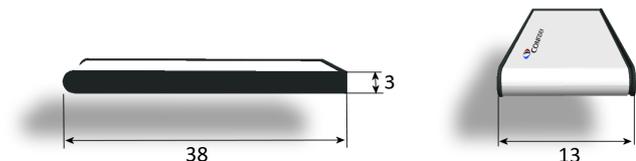

1.3 ELECTRICAL PERFORMANCE

**Steelwave Micro Monza3,
On metal**

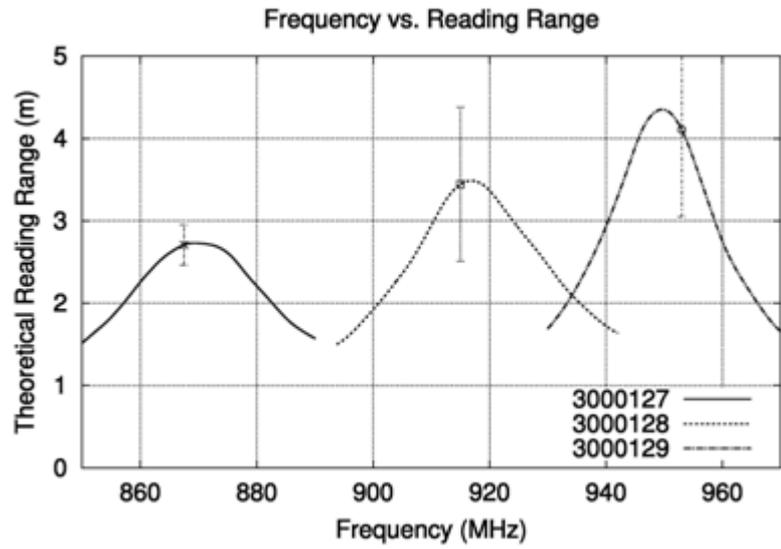


* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Variation of 3σ from test batch marked in the picture. Note, tag performance in other frequency bands is not marked in the picture; tag will remain functional but the performance is low.

Steelwave Micro Monza3; on plastic	1-1.5 m / 3-5 ft
Steelwave Micro Higgs3; on metal	4 m / 13 ft

1.4 RADIATION PATTERNS

Estimated radiation pattern when tag orientation towards reader antenna is optimized.

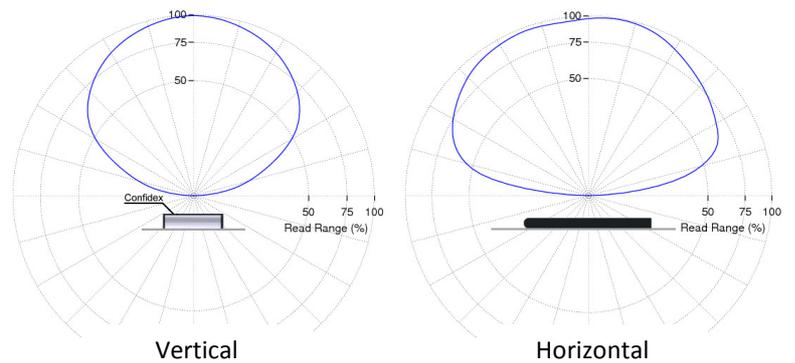

1.5 RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS*

Typically values are valid for all tag versions. If not, applicable IC versions are marked

Operating temperature	-20°C to +85°C / -4°F to +185°F
Ambient temperature	-20°C to +85°C / -4°F to +185°F
IP classification	IP67: - Complete protection against dust - Protection against temporary immersion in water
Chemical resistance	No physical or performance changes in: - 2 hour Salt water exposure (salinity 10%) - 2 hour Motor oil exposure Additionally, short time exposure resistant against sulfuric acid. Acetone and sodium hydroxide should be avoided.

Expected lifetime	Years in normal operating conditions
--------------------------	--------------------------------------

** Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

1.6 SUPPORTING COMPONENTS

3M background adhesive

Purpose	High performance adhesive for attaching Steelwave Micro on metal surfaces.
Advantages	Quick and simple attachment method without additional tools
Size	Die-cut according to the tag shape
Type	3M High performance acrylic adhesive
Delivery format	Attached to the tag
Delivered by default on the Steelwave Micro background	

1.7 SUPPORTED SERVICES

There are several personalization options available for Confidex Steelwave Micro™ in order to “fine tune” the tag to match with the application requirements:

- Pre-encoding
- Customized data label

For exact specifications, please refer “Personalization Datasheet”.

1.8 POSSIBLE APPLICATIONS

Metal surfaces	Indoor applications; fixed IT assets, other metal assets
Plastic surfaces	IT assets with plastic cover

2 INSTALLATION INSTRUCTIONS

2.1 TAG PLACEMENT

Steelwave Micro tag polarization is aligned with the “Confidex” text.

Tag design is optimized for on-metal use: **In order to achieve the optimum performance Steelwave Micro must be placed on metal surface** without covering its front side.

When selecting the location on metal surface, ensure the following:


- Select an even surface so that there is direct metal contact underneath the whole tag.
- The metal background should be preferably as large as possible and tag should be placed so that it's left side is on the metal edge.
- If surface is small, install the tag in such way that **most free metal area is left on the tag's right side.**




Example:

In the two pictures below an unsymmetrical metal item is shown which has basically two options for placing the tag. **Left picture shows better and recommended placement for Steelwave Micro; free metal area is left on the right side of the tag** which will enhance tag's RF performance. Other shown placement is not recommended if maximum tag performance should be reached.

Recommended:

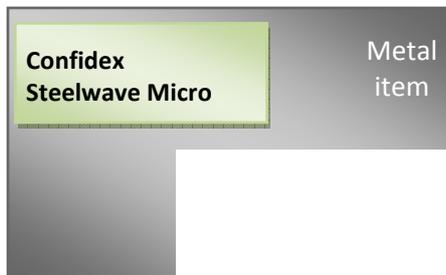

Not recommended:

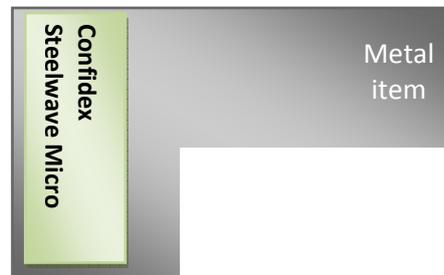

2.2 TAG FIXING METHODS

Adhesive fixing

- 3M acrylic adhesive

Procedure: When mounting the tag with its adhesive background, clean and dry the surface for obtaining the maximum bond strength. Ideal application temperature is from +21°C to +38°C (+70°F to +100°F), bond strength can be improved with firm application pressure and moderate heating from +38°C to +54°C (+100°F to +130°F). Application at temperatures below 10°C (50°F) is not recommended.

3 ORDER INFORMATION

Product number	Product name
3000127	Steelwave Micro ETSI Monza
3000128	Steelwave Micro FCC Monza
3000129	Steelwave Micro JPN Monza
3000180	Steelwave Micro FCC Higgs3

For additional information and technical support contact Confidex Ltd.

FINLAND

Confidex Oy Ltd.

Haarlankatu 1, 33230 Tampere, Finland

Tel. +358 10 4244 100 Fax. +358 10 4244 110

contact@confidex.fi www.confidex.fi

USA

Confidex Inc.

1502 Fair Weather Ct., Apex, NC 27523, USA

Tel. +1 919 349 5607 fax +1 810 958 0515

www.confidex.net

CHINA

Confidex China

Guangzhou XinTag Electronics Science and Technology Co. Ltd

3 F Section E Guangzhou Technology Innovation Base

No. 80 Lan Yue Road, Science City, PRC 510663 Guangzhou,

People's Republic of China

Tel. +86 20 3205 7361 fax +86 20 3205 1429

www.confidex.net.cn

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.