

# SRT

## UHF Small Rigid RFID Tag



- Rugged encapsulation for harsh environments
- Consistent UHF range performance worldwide
- Gen 2 and ISO 18000-6B versions
- Superior performance on a variety of materials
- Reusable for lower cost per use
- RoHS and WEE compliant

Intermec's Small Rigid Tag (SRT) is a truly passive UHF RFID tag designed for superior performance on a variety of surfaces. The tag available in both EPC Global Class 1, Generation 2 (Gen 2) and ISO 18000-6B protocols, combines an impressive range with a rugged yet compact design, suitable for harsh industrial applications, and survival in application temperatures up to 250° F (121° C). Additionally, the small rigid tags have a wide band antenna design, which allows for a single tag to be used virtually anywhere in the world and on a variety of surfaces, including metal, plastic and wood.

The Small Rigid Tags are ideal for industrial applications where ruggedness, chemical resistance or higher temperature ratings are required and where tag size is an important consideration.

### Typical applications include:

- Reusable plastic containers (RPC)
- Metal cages
- Pallets
- Unit Loading Devices (ULD)
- Gas cylinders
- Beer kegs & other commercial beverage containers
- Hazmat containers
- Chemical containers

### Attachment Methods

The tags can be attached using screws, rivets, double-sided adhesive strips, or a variety of other methods appropriate for the application. Each tag has two mounting holes for up to #6 hardware (not included).

### Reader Compatibility

Intermec manufactures a complete line of readers that are compatible with the small Rigid Tags as indicated in the table below.

Tag Type	Intermec Reader Models
EPC Global Gen 2	IP4 Hand-Held Reader
	IF4 Fixed Serial Reader
	IF5 Fixed Network Reader
	IV7 Vehicle Mount Reader
ISO 18000- 6B	IP3 Hand-Held Reader
	IP4 Hand-Held Reader
	Pennsylvania Fixed Serial Reader
	IF4 Fixed Serial Reader
	IF5 Fixed Network Reader
	IV7 Vehicle Mount Reader

Competitive readers conforming to the Gen 2 and ISO 18000-6B protocols can also read the tags conforming to these respective protocols.

### Temperature Ratings

The new Intermec Rigid Tags are rated for applications with temperatures ranging from -40° to 250° F (-40° to 121° C).

### Chemical Resistance


The Rigid Tags are tested for resistance to the following chemicals.

- Machining oil and fluid (long-term exposure)
- Gasoline
- Motor oil
- Methyl Ethyl Ketone (MEK)
- Isopropyl alcohol
- Methyl alcohol
- Mineral spirits
- Acetone
- Kerosene

### Optimal Frequencies of Operation

- ISO 18000-6B: 860 MHz to 930 MHz
- EPCglobal Gen 2: 860 MHz to 960 MHz

Read Range Performance of Small Gen 2 Rigid Tag

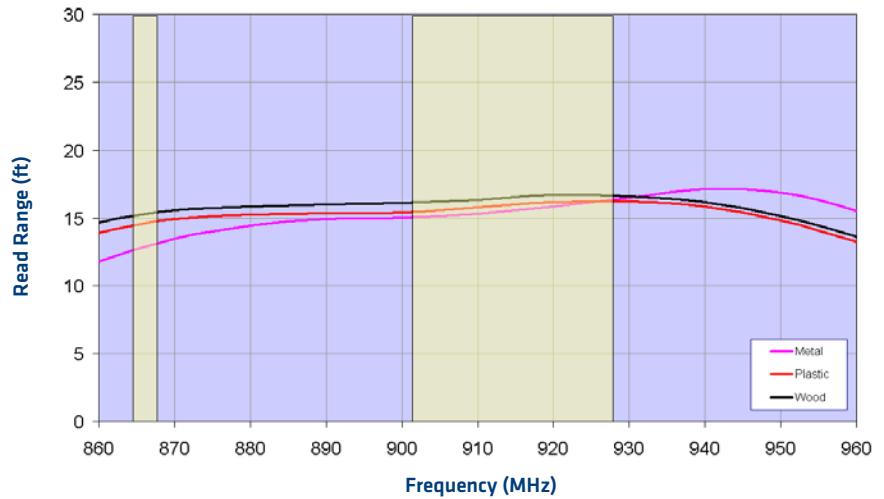


### Note

Actual range performance may vary depending on power output, temperature and other environmental factors.

### Size

1.22 in x 3.11 in (3.10 cm x 7.90 cm)

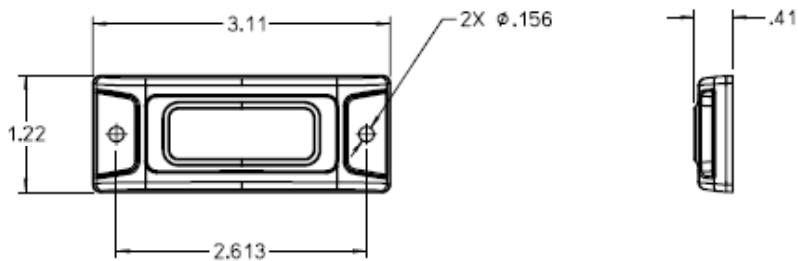

### Available Silicon & Memory Size

Air Interface	Silicon Type	Memory Size	Comments
EPC Global Class 1 Generation 2	Impinj Monza	96 bits	Unprogrammed
ISO 18000-6B	Philips UCODE HSL	2048 bits	Includes pre-programmed and locked unique ID per ISO 18000-6B specification

#### North America

##### Corporate Headquarters

6001 36th Avenue West  
Everett, Washington 98203  
Phone: (425) 348-2600  
Fax: (425) 355-9551

##### South America & Mexico Headquarters Office

Newport Beach, California  
Phone: (949) 955-0785  
Fax: (949) 756-8782

#### Europe/Middle East & Africa Headquarters Office

Reading, United Kingdom  
Phone: +44 118 923 0800  
Fax: +44 118 923 0801

#### Asia Pacific

Headquarters Office  
Singapore  
Phone: +65 6303 2100  
Fax: +65 6303 2199

#### Internet

www.intermec.com  
Worldwide Locations:  
www.intermec.com/locations

#### Sales

Toll Free NA: (800) 934-3163  
Toll in NA: (425) 348-2726  
Freephone ROW: 00 800 4488 8844  
Toll ROW: +44 134 435 0296

#### OEM Sales

Phone: (425) 348-2762

#### Media Sales

Phone: (513) 874-5882

#### Customer Service and Support

Toll Free NA: (800) 755-5505  
Toll in NA: (425) 356-1799



Copyright © 2008 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611767-01C 11/08

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

